




DURCHGANGSKUGELHÄHNE MIT GEWINDEANSCHLUSS
2-WAY BALL VALVES WITH THREAD CONNECTIONS


984



984D.2 | Flügelgriff | IG/IG | DIN Baul. Universalh. DVGW TW und Gas
984D.2 | T-handle | F/F | DIN length DVGW drinking water and natural gas

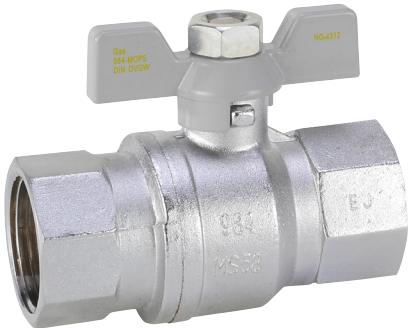

Druck-Temperatur-Diagramm pressure-temperature-diagram

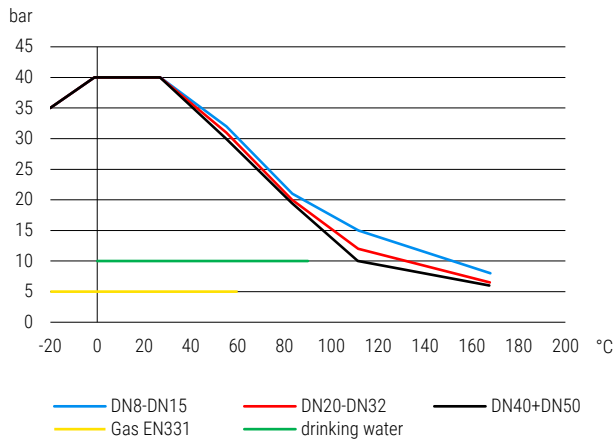

Konstruktionsmerkmale Kugelhahn

- Ausblassichere Schaltwelle
- Silikonfrei
- Gewinde nach DIN EN 10226-1
- Kennzeichnung nach EN 19
- Voller Durchgang nach DIN EN 1983

Standardtemperaturbereich

- 20°C bis + 170°C (abhängig vom Betriebsdruck)
Siehe Druck-Temperaturdiagramm

Zulassungstext

Einstufung nach PED Kategorie 1 PED 2014-68-EU, DVGW Gas Zulassung MOP5 nach DIN EN 331, HTB geprüft nach EN 331 MOP5 B0,1, DVGW Zulassung nach Gasgeräteverordnung GAR EU-2016-426, DVGW Trinkwasser Zulassung PN10 nach DIN EN 13828 W570-1, LABS konform nach VDMA 24364, Für Trinkwasser geeignet

Verwendung

Druckluft, Wasser allgemein, Kraftstoffe, Trinkwasserinstallation, Heizungskreisläufe, Heizöl, Acetylen, Wasserstoff, Gase nach G260, Argon, Wasser-Glykol-Mischungen, Öl, Thermoöl, Tyfocor, Stickstoff gasförmig, Kohlenstoffdioxid

Design features ball valve

- Blow out proved stem design
- Free of silicon
- Thread acc. to DIN EN 10266-1
- Marking acc. to EN 19
- Full port acc. to DIN EN 1983

Standard temperature range

- 20°C to + 170°C (depending on working pressure)
Take a look at the pressure-temperature-diagram

Approval text

Classification acc. to PED category 1 PED 2014-68-EU, DVGW gas approval MOP5 acc. to DIN EN 331, HTB certified acc. to EN 331 MOP5 B0,1, DVGW-approval acc. to gas appliance regulation GAR EU-2016-426, DVGW drinking water approval PN10 acc. to DIN EN 13828 W570-1, LABS conformity acc. to VDMA 24364, Suitable for drinking water

Suitable for

Compressed air, general water, Fuels, Drinking water installation, Heating circuits, Heating oil, Acetylen, Hydrogen, Gases acc. to G260, Argon, Water-glycol mixture, Oils, Thermo-oil, Tyfocor, Nitrogen gaseous, Carbon dioxide



DURCHGANGSKUGELHÄHNE MIT GEWINDEANSCHLUSS
2-WAY BALL VALVES WITH THREAD CONNECTIONS


984

BESTELLBEISPIEL: Kugelhahn beiderseits Innengewinde DIN-Baulänge mit Flügelgriff Größe 1/2" = 984D.2-1/2" Artikel-Nr. 0020005002015
ORDERING EXAMPLE: Ball valve female/female thread DIN length with T-handle size 1/2" = 984D.2-1/2" item number 0020005002015

Datentabelle data table

D1	D2	DN	LW	PN	L	L1	MM	R	H	D	SW	Gewicht Weight (kg)	Artikel-Nr. Item number
		(mm)	(mm)	(bar)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		
Rp 1/4"	Rp 1/4"	8	9	40	50	11	22,5	25	32,5	26	20	0,132	0020005002006
Rp 3/8"	Rp 3/8"	10	9	40	60	11,5	23	25	32,5	26	20	0,112	0020005002010
Rp 1/2"	Rp 1/2"	15	14	40	75	15	30	30	40	32	25	0,233	0020005002015
Rp 3/4"	Rp 3/4"	20	19	40	80	16	35	30	43	40	31	0,310	0020005002020
Rp 1"	Rp 1"	25	24	40	90	19	40	33	49	46	38	0,447	0020005002025
Rp 1 1/4"	Rp 1 1/4"	32	30	40	110	21	47	33	53,5	57	48	0,776	0020005002032

Maßskizze measured sketch

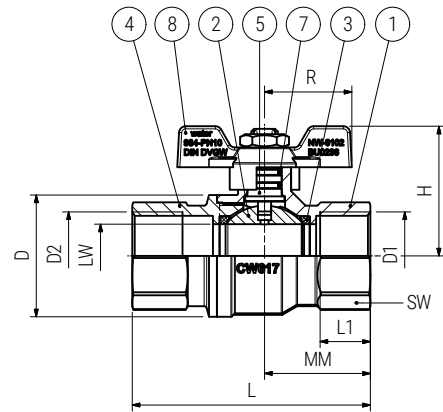

Verpackungseinheiten Packing units

DN (mm)		
8	10	1
10	10	1
15	10	1
20	10	1
25	8	1
32	1	1

Materialtabelle materials grid

Nr. No.	Bezeichnung Description	Werkstoff Material	Materialbezeichnung Material description
1	Gehäuse Body	Messing verchromt Brass (chrome-plated)	CW617N
2	Kugel Ball	Messing verchromt Brass (chrome-plated)	CW617N
3	Kugeldichtung Ball seal	PTFE PTFE	-
4	Flansch / Nippel Flange / nipple	Messing verchromt Brass (chrome-plated)	CW617N
5	Schaltwelle Stem	Messing verchromt Brass (chrome-plated)	CW614N
7	Spindeldichtung Spindle seal	FKM und NBR FKM and NBR	-
8	Griff Handle	Aluminium Aluminium	-