



DURCHGANGSKUGELHÄHNE MIT GEWINDEANSCHLUSS
2-WAY BALL VALVES WITH THREAD CONNECTIONS

984




984T.1 | Messing | ISO T-Griff | IG/AG | Universalhahn DVGW Trinkwasser und Gas
984T.1 | Brass | ISO T-handle | F/M | DVGW drinking water and natural gas

1.1



Druck-Temperatur-Diagramm pressure-temperature-diagram

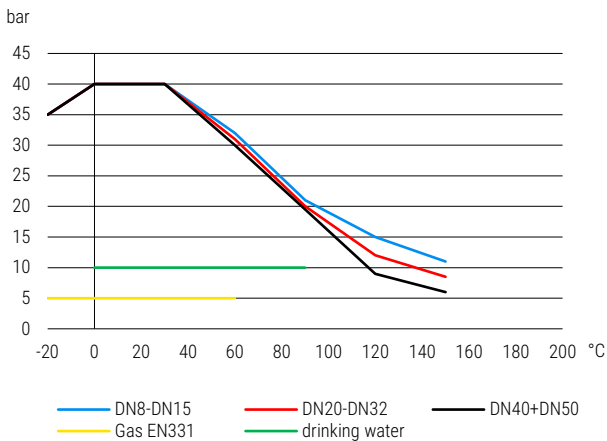

Konstruktionsmerkmale Kugelhahn

- Ausblassichere Schaltwelle
- Silikonfrei
- Gewinde nach DIN EN 10226-1
- Kennzeichnung nach EN 19
- Voller Durchgang nach DIN EN 1983

Standardtemperaturbereich

- 20°C bis + 180°C (abhängig vom Betriebsdruck)
Siehe Druck-Temperaturdiagramm

Zulassungstext

Einstufung nach PED Kategorie 1 PED 2014-68-EU, DVGW Gas Zulassung MOP5 nach DIN EN 331, HTB geprüft nach EN 331 MOP5 B0,1, DVGW Zulassung nach Gasgeräteverordnung GAR EU-2016-426, DVGW Trinkwasser Zulassung PN10 nach DIN EN 13828 W570-1, LABS konform nach VDMA 24364, Für Trinkwasser geeignet

Verwendung

Druckluft, Wasser allgemein, Kraftstoffe, Trinkwasserinstallation, Heizungskreisläufe, Heizöl, Acetylen, Wasserstoff, Gase nach G260, Argon, Wasser-Glykol-Mischungen, Öl, Ther-moöl, Tyfocor, Stickstoff gasförmig, Kohlenstoffdioxid

Design features ball valve

- Blow out proved stem design
- Free of silicon
- Thread acc. to DIN EN 10266-1
- Marking acc. to EN 19
- Full port acc. to DIN EN 1983

Standard temperature range

- 20°C to + 180°C (depending on working pressure)
Take a look at the pressure-tempera-ture-diagram

Approval text

Classification acc. to PED category 1 PED 2014-68-EU, DVGW gas approval MOP5 acc. to DIN EN 331, HTB certified acc. to EN 331 MOP5 B0,1, DVGW-approval acc. to gas appliance regulation GAR EU-2016-426, DVGW drinking water approval PN10 acc. to DIN EN 13828 W570-1, LABS confor-mity acc. to VDMA 24364, Suitable for drinking water

Suitable for

Compressed air, general water, Fuels, Drinking water installation, Heating circuits, Heating oil, Acetylen, Hydrogen, Gases acc. to G260, Argon, Water-glycol mixture, Oils, Thermo-oil, Tyfocor, Nitrogen gaseous, Carbon dioxide



DURCHGANGSKUGELHÄHNE MIT GEWINDEANSCHLUSS
2-WAY BALL VALVES WITH THREAD CONNECTIONS


984

BESTELLBEISPIEL: Kugelhahn Innengewinde/Außengewinde mit ISO-T-Griff Größe 1/2" = 984T.1-1/2" Artikel-Nr. 0020005008015
ORDERING EXAMPLE: Ball valve female / male thread with ISO T-handle size 1/2" = 984T.1-1/2" item number 0020005008015

Datentabelle data table

D1	D2	DN	LW	PN	L	L1	L2	MM	R	H	D	SW	Gewicht Weight (kg)	Artikel-Nr. Item number
		(mm)	(mm)	(bar)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		
Rp 1/4"	R 1/4"	8	6	40	55,5	11	11	22,5	35	67	26	20	0,162	0020005008006
Rp 3/8"	R 3/8"	10	9	40	56,5	11,5	11,5	23	35	67	26	20	0,162	0020005008010
Rp 1/2"	R 1/2"	15	14	40	72	15	13,2	30	35	71	32	25	0,252	0020005008015
Rp 3/4"	R 3/4"	20	19	40	83	16	16	35	35	74	40	31	0,374	0020005008020
Rp 1"	R 1"	25	24	40	91,5	19	19	40	40	87	46	38	0,545	0020005008025
Rp 1 1/4"	R 1 1/4"	32	30	40	107,5	21	21	47	40	91	57	48	0,849	0020005008032
Rp 1 1/2"	R 1 1/2"	40	38	40	115,5	21	21	51,5	60	118	69	54	1,191	0020005008040
Rp 2"	R 2"	50	47	40	133	25	25	61,5	60	126	86	66	1,915	0020005008050

Maßskizze measured sketch

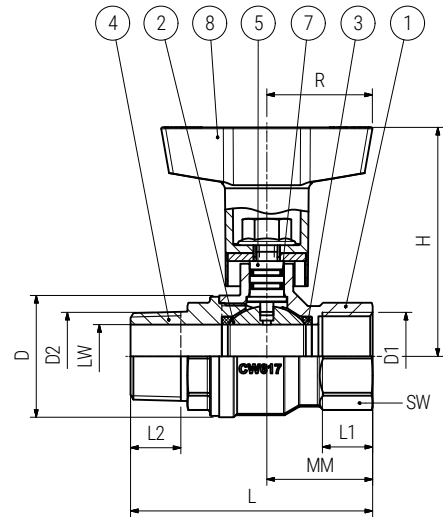

Materialtabelle materials grid

Nr. No.	Bezeichnung Description	Werkstoff Material	Materialbezeichnung Material description
1	Gehäuse Body	Messing verchromt Brass (chrome-plated)	CW617N
2	Kugel Ball	Messing verchromt Brass (chrome-plated)	CW617N
3	Kugeldichtung Ball seal	PTFE PTFE	-
4	Flansch / Nippel Flange / nipple	Messing verchromt Brass (chrome-plated)	CW617N
5	Schaltwelle Stem	Messing verchromt Brass (chrome-plated)	CW614N
7	Spindeldichtung Spindle seal	FKM und NBR FKM and NBR	-
8	Griff Handle	Polyamid Polyamide	-

Verpackungseinheiten Packing units

DN (mm)		
8	4	1
10	7	1
15	6	1
20	10	1
25	8	1
32	4	1
40	3	1
50	2	1

1.1